
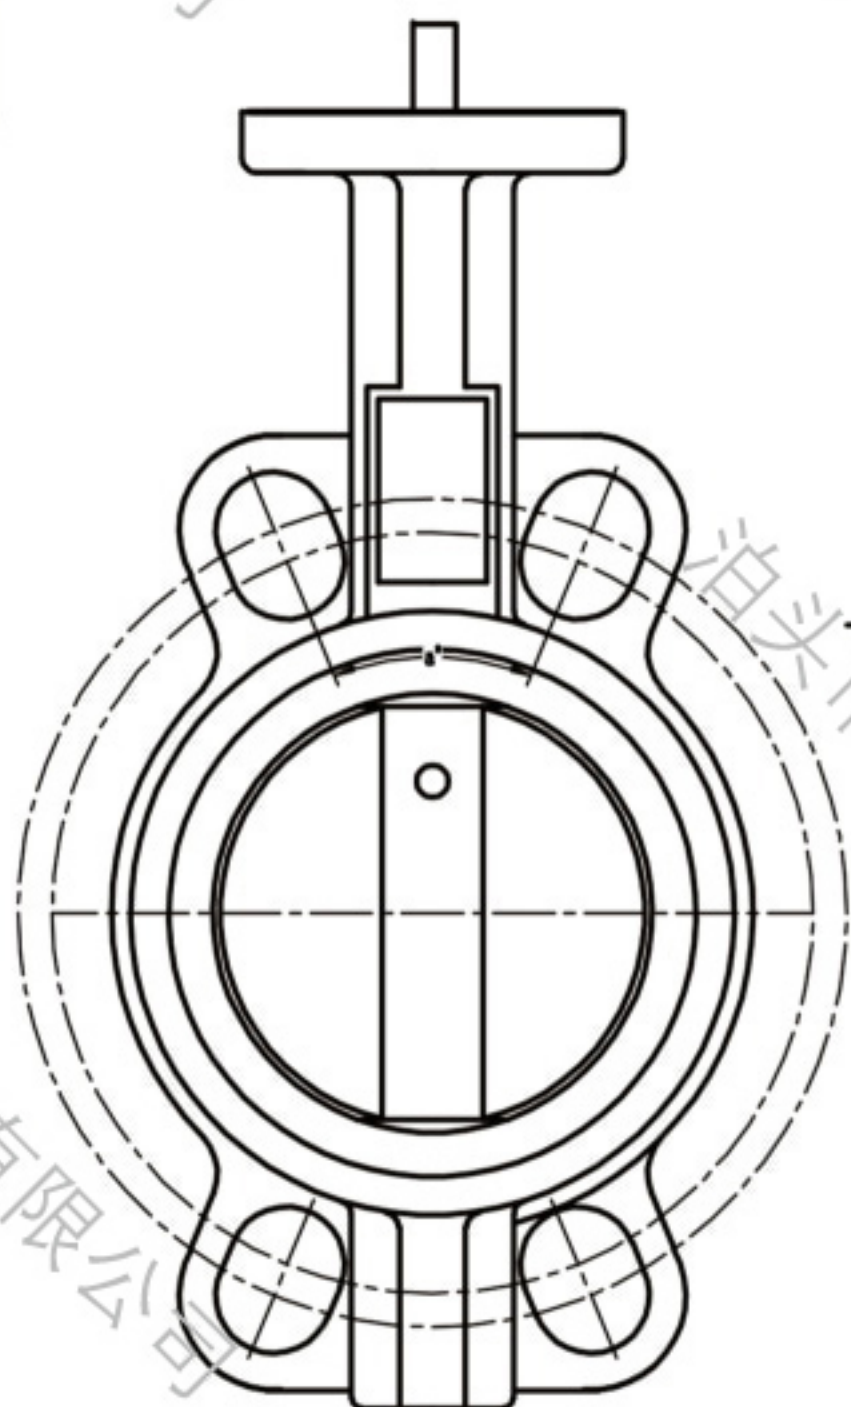


BUTTERFLY VALVE

WAFER BUTTERFLY VALVE DN40-DN1200

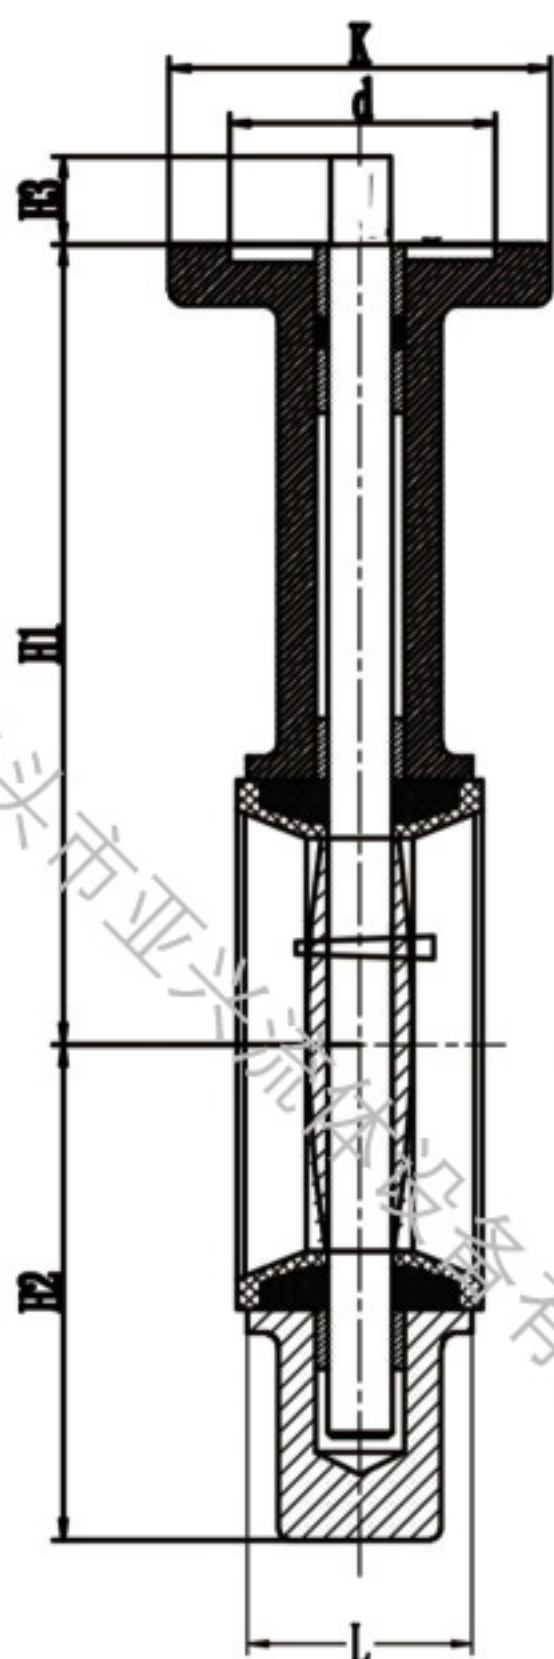

Part & Materials		
NO	Part	Material
1	Body	Ductile Iron GGG50
2	Disc	DI/CF8/CF8M
3	Shaft	SS410
4	Seat	EPDM /NBR
5	Sleeve	Polymer
6	Handle/Gear Box	Steel/Aluminum/Cl

Technical Data		
NO	Description	Specification
1	Nominal Dia	DN40-DN1200
2	Nominal Pressure	PN10/16&10K&Class 125/150
3	Valve Design Standard	EN593
4	Face to Face Standard	EN558&ISO5752 Series-20
5	Expoxy Coating	Epoxy powder coating RAL5005 with minimum thickness of 250 microns inside and outside.
6	Working Temperature(Max)	120/80°C

DIMENSIONS (MM)

DN	H1	H2	H3	Flange Type.	K	F	d	N-d1	l	
DN40	33	128	65	29	F05	65	50	35.5	4-8	9*9
DN50	43	129	75	29	F05	65	50	35.5	4-8	9*9
DN65	46	136	82	29	F05	65	50	35.5	4-8	9*9
DN80	46	153	99	29	F05	65	50	35.5	4-8	9*9
DN100	52	171	110	29	F07	90	70	55.5	4-10	11*11
DN125	56	193	125	29	F07	90	70	55.5	4-10	14*14
DN150	56	209	145	29	F07	90	70	55.5	4-10	14*14
DN200	60	251	170	35	F10	125	102	70.5	4-12	17*17
DN250	68	281	210	35	F10	125	102	70.5	4-12	19*19
DN300	78	316	238	35	F10	125	102	70.5	4-12	22*22
DN350	78	348	260	45	F10	125	102	70.5	4-12	22*22
DN400	102	386	295	51.2	F14	175	140	100.5	4-18	27*27

Yaxing product specifications in this catalog are for reference only. Yaxing reserves the rights to change without prior notice.